

MDU 230

Data display unit – LCD
Alphanumeric and Dot matrix area

Description

The MDU 230 is a combined dashboard and input module for use either as a stand-alone display unit, or as an integral part of a complete data acquisition and monitoring system for use in the demanding environment found in motorsports vehicles.

The compact dimensions of the MDU 230 make it particularly suitable for motorbike applications. The advanced features of the LCD also make this product suitable for car applications.

The MDU 230 is equipped with a comprehensive range of analogue and digital inputs. The graphical bar indicator is typically used for representing engine revs. Three fields are typically dedicated to gear number, lap number and lap time and two generic fields have a configurable label. A dot matrix area can show up to 11 pages (one of this show date and time) which can show from 1 to 8 channels each. The alarms are visualized in a further page of the dot matrix.

As part of the Magneti Marelli data acquisition and telemetry system, the MDU 230 can communicate over a CAN network with a range of data loggers receiving and displaying data from the logger as well functioning as an additional input module.

Possibility of GPS integrated.



Main Features

- Visible area LCD 164 x 67.5 mm
- Dot matrix area resolution: 132 x 64 dots
- On display is shown: bar graph, gear number, speed, lap time, best lap, lap number and 11 pages available in the dot matrix area
- 2 push-button on the front panel for page and bar graph selection, temporary alarm disable, brightness regulation
- 6 high-brightness warning lights green/yellow/red for gear change (with programmable threshold for each gear)
- 2 high-brightness warning blue leds and 4 RGB programmable leds for general alarm
- 6 Single-ended
- 3 Pick-ups or Hall effect
- 2 Temperature
- 2 Lap Triggers
- 1 Internal 3 Axial accelerometer

Benefits

- Bar graph with 2 configurable non-linear scale, manually selectable or automatically swapped by condition
- Available 8 brightness steps for backlight regulation
- Alarm channels with programmable thresholds and linkable to leds
- Inputs configurable to suit all sensors in the product range
- 1 outputs for external warning lamps
- Transmit internal inputs and channels over CAN bus
- Easy to use and configure
- Designed for rugged applications

Typical Applications

- All race applications

DATA DISPLAY

MDU 230

Data display unit – LCD
Alphanumeric and Dot matrix area

Technical Characteristics

Inputs

Single-ended (2 @ 12 bit).....	6
NTC/PT1000 temperature sensor.....	2
NTC internal temperature sensor	1
Internal 3 axial accelerometer (up to 6 g)	1
VR Pick-ups or Hall effect.....	3
Remote push button.....	2
Lap Trigger.....	2
"Code Load" enable pin	1

Outputs

Voltage references (@ 5 V, 70 mA).....	1
External lamps driver	1

Leds

Green gear shift leds.....	2
Yellow gear shift leds	2
Red gear shift leds	2
Blue alarm leds	2
RGB functions leds	4

8 brightness steps for each leds

Communications

CAN line (1 Mbit/s (*)).....	2
Ethernet line (10/100base T)	1

(*) 1 Configurable on request as Flex-Ray (10 Mbit/s)


Logic Core

Microcontroller (64 MIPS RISC).....	1	
Flash EPROM (microcontroller).....	1	Mbyte
RAM memory (microcontroller).....	48	Kbyte
Flash EPROM	32	Mbyte
RAM memory	32	Mbyte
E2PROM.....	32	Kbyte
Time keeper	1	

Other Characteristics


Power supply	8 to 18	V
Operating internal temperature (Excl. Ethernet)	85	°C
Protection class.....	IP 64	
Visible area LCD.....	164 x 67.5	mm
Dimensions		
without connector	202 x 105 x 19	mm
with connector	202 x 105 x 23	mm
Weight (approx.)	400	g

Dimensions

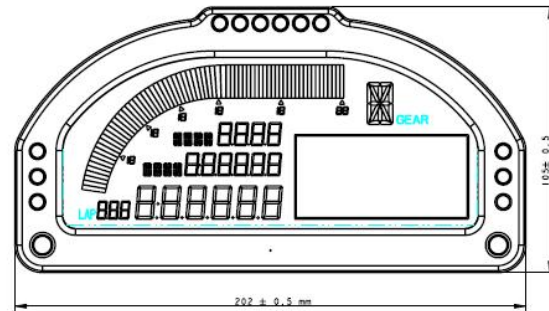

Dimensions in millimetres

Application Schematics

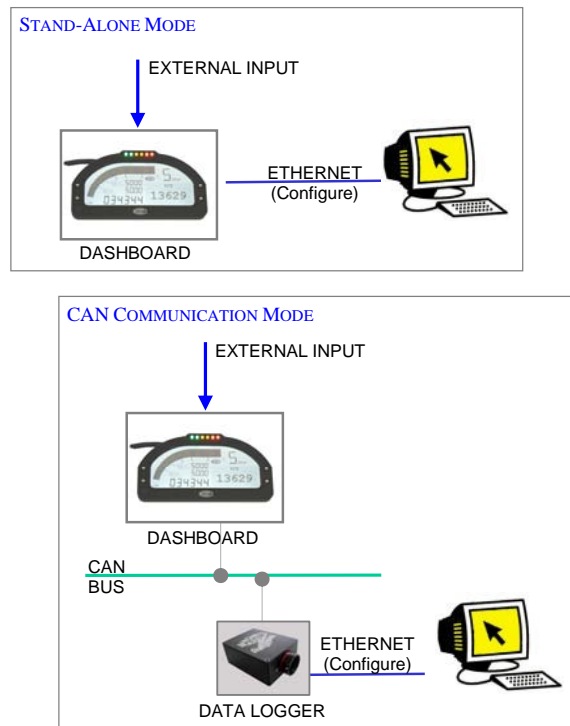

MDU 230-0838XXXXXX00

For further information, please contact:



Magneti Marelli S.p.A.
Motorsport
Viale Aldo Borletti, 61/63
20011 Corbetta (Milano) Italy

Tel. +39 02 972 27 478
Fax +39 02 972 27 570
sales@magnetimarelli.com
http://www.magnetimarelli.com

June 2011
rel. 09
page 2 of 2